


# SK03 IP ACCESS CONTROLLER

## DATA SHEET

[v.1.6]

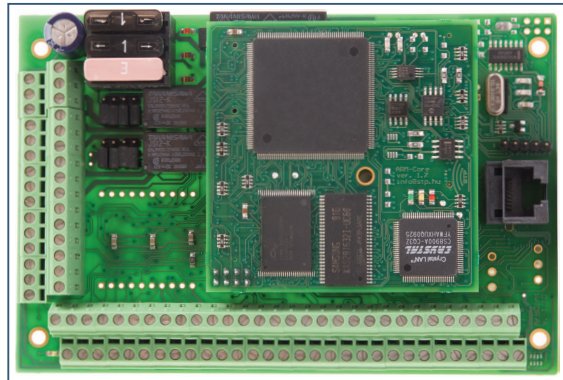

### TECHNICAL SPECIFICATION

Description	IP based access controller
Part number	SK03-T/M/W/CD (T-TIRIS, M-Mifare, W-Wiegand, CD-ClockData)
Application	Access Control one door, two way operation
Peripheral devices	
Proximity readers	STP TIRIS proximity readers
1 IN and 1 OUT direction	STP Mifare proximity readers Third party Wiegand or Clock/Data readers
Terminals	2 STP Keypad with or without LCD display
Other peripherals	2 strikes, current consumption up to 1 A / 30V 4 dedicated inputs (Hand open, Open Sense, for each directions) 4 alarm inputs (DEOL/47k) 4 OC outputs (max. 0.5A load) 6 standard inputs 2 dedicated inputs for AC power and Battery status monitoring Emergency open input, for local or remote control RS232C line for other devices
Ethernet connection	10 Mbit/s, RJ45 connector, FIX IP address required
Power supply	STP enclosure with uninterruptible power supply (SH02-01)

### MECHANICAL SPECIFICATION

Dimension	134 x 90 mm
Mounted height width spacer	38 mm
Fixing holes	4 x D3 holes, distances: 124.5x72.5 mm

### ELECTRICAL SPECIFICATION

Supply voltage	8-15V
Current consumption	Typical: 100 mA without peripherals
Operating temperature	0°C - +50°